




3+1 CCTV Cable VC020

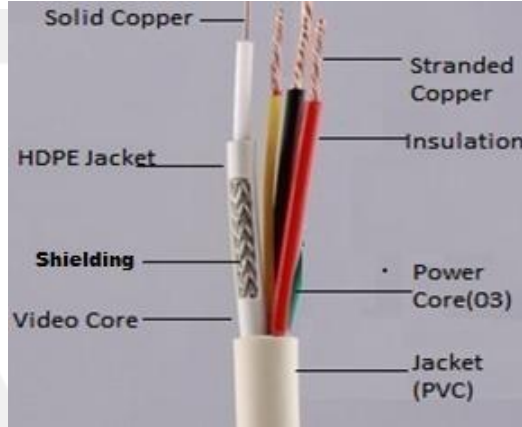

Construction:

Power Core Conductor	
Conductor Type	<i>Stranded Annealed Bare Copper Conductor</i>
No. of Wire/Size of Wire (Nos./mm)	<i>14/0.10±0.010mm</i>
Insulation	<i>PVC</i>
No. of Core	<i>03</i>
Colour Code	<i>Red, Yellow & Grey</i>
Power core OD	<i>1.25 ±0.10mm</i>
Video Core	
Conductor Type	<i>Solid Annealed Bare Copper Conductor</i>
No. of Wire/Size of Wire (Nos./mm)	<i>01/0.52±0.015mm</i>
Insulation	<i>HDPE</i>
No. of Core	<i>01</i>
Colour Code	<i>Natural</i>
Core O.D.	<i>1.35 ± 0.10mm</i>

VOLTAIC CABLE PVT LTD
A Quality Prefer Name



Shield (Video Core Shielding)	
Shielding	Al-Mylar
Braiding	Al-Alloy wire
Video Core Jacketing	PVC
Colour of Jacket	BLACK
Video Core OD	2.60 ±0.20 Mm
Outer Sheath	
Material	PVC
Colour of Jacketing	WHITE (As per Customer Required)
Thickness of Outer Jacket	0.65±0.10mm mm(Nom.)
Outer Dia.	5.60±0.30 mm
Sequential Marking	At Every Meter
Packing	
Standard Length (As Per Customer Req.)	90/ 180 in box

LOWFREQUENCYELECTRICAL&MECHINCALPARAMETER

- ConductorResistance(DC)OfSolid:86Ω/Km@20°C.(Max).
- ConductorResistance(DC) OfStranded:172.0Ω/km@20°C.(Max)
- T.S.InPvcJacket-12.5N/SQmm.(Min)
- Elongationinpvcjacket-150%(Min.)

VOLTAIC CABLE PVT LTD
A Quality Prefer Name

VOLTAIC HOUSE, S.K. IND.2 Co-Op. Soc., Shed No. A-6, Nr. Komal Circle,
120 Feet Road, Bamroli, Surat – 395003, Gujarat, India
(M) 098247 22252 (O) 0261-2633755 (E) info@voltaiccables.com (W) www.voltaiccables.com